



Order Code


UB2000-30GM-E4-V15

Features

- Switch output
- 5 different output functions can be set
- TEACH-IN input
- Synchronisation options
- Deactivation option
- Temperature compensation
- Insensitive to compressed air

Electrical Connection

Standard symbol/Connections:
(version E4, npn)




Core colours in accordance with EN 60947-5-2.

Connector V15



Dimensions

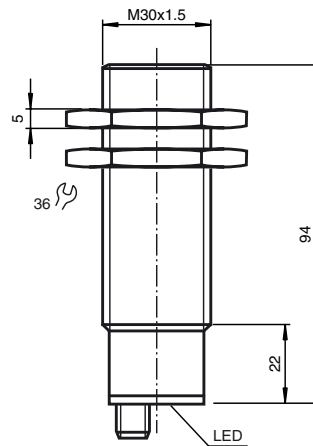

Technical Data

General specifications

Sensing range	80 ... 2000 mm
Adjustment range	120 ... 2000 mm
Unusable area	0 ... 80 mm
Standard target plate	100 mm x 100 mm
Transducer frequency	approx. 180 kHz
Response delay	approx. 150 ms

Indicators/operating means

LED green	permanent: Power-on flashing: TEACH-IN function object detected
LED yellow	permanent: switching state switch output flashing: TEACH-IN function
LED red	normal operation: "fault" TEACH-IN function: no object detected

Electrical specifications

Operating voltage U_B	10 ... 30 V DC, ripple 10 % _{SS}
No-load supply current I_0	≤ 50 mA

Input/output

Synchronisation	bi-directional 0 level: $-U_B \dots +1 V$ 1 level: $+4 V \dots +U_B$ input impedance: > 12 KOhm synchronisation pulse: ≥ 100 μs, synchronisation interpulse period: ≥ 2 ms
-----------------	--

Synchronisation frequency

Common mode operation	≤ 30 Hz
Multiplex operation	≤ 30/n Hz, n = number of sensors

Input

Input type	1 TEACH-IN input, operating range 1: $-U_B \dots +1 V$, operating range 2: $+4 V \dots +U_B$ input impedance: > 4.7 kΩ; TEACH-IN pulse: ≥ 1 s
------------	--

Output

Output type	1 switch output E4, npn NO/NC, parameterisable
Rated operational current I_e	200 mA, short-circuit/overload protected
Voltage drop U_d	≤ 2.5 V
Repeat accuracy	≤ 0.5 % of switching point
Switching frequency f	≤ 3.3 Hz
Range hysteresis H	1 % of the set operating distance
Temperature influence	< 2 % of full-scale value

Standard conformity

Standards	EN 60947-5-2
-----------	--------------

Ambient conditions

Ambient temperature	-25 ... 70 °C (248 ... 343 K)
Storage temperature	-40 ... 85 °C (233 ... 358 K)

Mechanical specifications

Protection degree	IP65
Connection	connector V15 (M12 x 1), 5 pin
Material	
Housing	brass, nickel-plated, plastic components PBT
Transducer	epoxy resin/hollow glass sphere mixture; polyurethane foam
Mass	140 g

Release date: 2008-11-20 17:40 Issue date: 2008-11-20 097968_ENG.xml

Description of sensor functions

Synchronization

This sensor features a synchronization input for the possible suppression of ultrasonic mutual interference. If this input is not connected, the sensor will operate using internally generated clock pulses. The synchronization of multiple sensors can be achieved as follows:

External synchronization:

The sensor can be synchronized by applying an external square wave. A synchronization pulse on the synchronization input starts a measuring cycle. The pulse must be longer than 100 μs. The measuring cycle starts with the falling edge of the synchronization pulse. Two operating modes are available:

1. Multiple sensors can be controlled by the same synchronization signal. The sensors are synchronized.
2. A separate synchronization pulse can be sent to each individual sensor. The sensors operate in multiplex mode.

Internal synchronization:

The synchronization connections of up to 5 sensors capable of internal synchronization are connected to one another. When power is applied, these sensors will operate in multiplex mode. The sensors stagger their ultrasonic bursts to eliminate the possibility of 2 or more units simultaneously sending or receiving signals.

If the synchronization signal remains low for > 1 second, the sensor will operate in normal mode.

Synchronization cannot be performed during PROGRAMMING and vice versa. The sensors must be operated in an unsynchronized manner to program the switch point.

A high level on the synchronization input disables the sensor.

Note:

If the option for synchronization is not used, the synchronization input must be connected to ground (0V) or the sensor must be operated using a V1 cordset (4-pin).

Programming the switch points

The ultrasonic sensor features a discrete output with two teachable evaluation limits. These are set by applying the supply voltage $-U_B$ or $+U_B$ to the PROGRAMMING input. The supply voltage must be applied to the PROGRAMMING input for at least 1 s. LED's indicate whether the sensor detected the target during the PROGRAMMING procedure. Evaluation limit A1 is taught with $-U_B$, A2 with $+U_B$. For easy programming, the handheld programmer UB-PROG2 can be used.

Five different output functions can be set:

1. Window mode, normally open function
2. Window mode, normally closed function
3. Single switch point, normally open function
4. Single switch point, normally closed function
5. Object presence detection

PROGRAMMING window mode, normally open function

- Set target to near switch point
- PROGRAM switch point A1 with $-U_B$
- Set target to far switch point
- PROGRAM switch point A2 with $+U_B$

PROGRAMMING window mode, normally closed function

- Set target to near switch point
- PROGRAM switch point A2 with $+U_B$
- Set target to far switch point
- PROGRAM switch point A1 with $-U_B$

PROGRAMMING single switch point, normally open function

- Set target to near switch point
- PROGRAM switch point A2 with $+U_B$
- Cover sensor with hand or remove all objects from sensing range
- PROGRAM switch point A1 with $-U_B$

PROGRAMMING single switch point, normally closed function


- Set target to near switch point
- PROGRAM switch point A1 with $-U_B$
- Cover sensor with hand or remove all objects from sensing range
- PROGRAM switch point A2 with $+U_B$

PROGRAMMING object presence detection


- Cover sensor with hand or remove all objects from sensing range

Characteristic Curves/Additional Information

Characteristic response curve

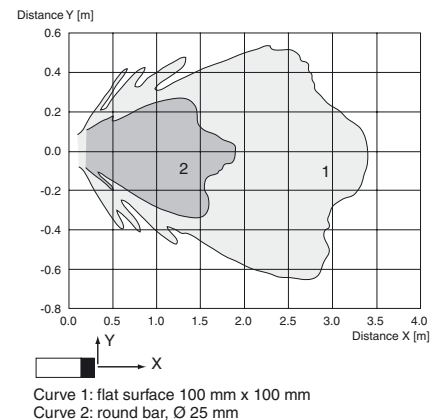

Programmed switching output function

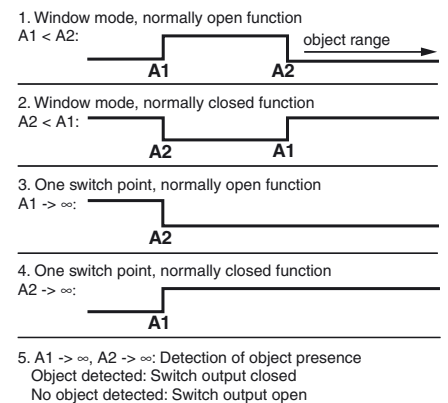

Accessories

- BF 30
Mounting flange
- BF 30-F
Mounting flange
- BF 5-30
Mounting flange
- M-105
Accessories
- UVW90-M30
Ultrasonic -deflector
- UVW90-K30
Ultrasonic -deflector
- UB-PROG2
Programming unit
- V15-G-2M-PVC
Cable connector
- V15-W-2M-PUR
Cable connector

Release date: 2008-11-20 17:40 Issue date: 2008-11-20 097968_ENG.xml

- PROGRAM switch point A1 with $-U_B$
- PROGRAM switch point A2 with $+U_B$

Default setting


A1: unusable area

A2: nominal sensing range

LED Displays

Displays in dependence on operating mode	Green LED	Red LED	Yellow LED
PROGRAMMING mode			
Object detected	flashes	off	flashes
No object detected	off	flashes	flashes
Object uncertain (PROGRAMMING invalid)	off	flashes	off
Normal operation	on	off	switching state
Interference	off	flashes	previous state

LED-Window



Mounting conditions

If the sensor is installed in places where the operating temperature can fall below 0 °C, the BF30, BF30-F or BF 5-30 fixing clamp must be used.