




Model Number

NEB22-30GM60-E2-V1

Features

- Comfort series
- 22 mm quasi-embeddable
- increased operating distance

Connection



Accessories

BF 30

Mounting flange

V1-G

Non pre-wired cable socket

V1-W

Non pre-wired cable socket


V1-G-2M-PUR

Cable connector

V1-W-2M-PUR

Cable connector

Dimensions

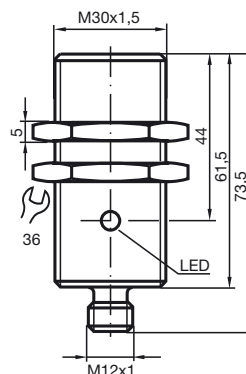

Technical Data

General specifications

Switching element function	PNP Make function
Rated operating distance	s_n 22 mm
Installation	quasi embedd.
Output polarity	DC
Assured operating distance	s_a 0 ... 17.8 mm
Reduction factor r_{AI}	0.25
Reduction factor r_{Cu}	0.22
Reduction factor r_{V2A}	0.65

Nominal ratings

Operating voltage	U_B	10 ... 30 V
Switching frequency	f	0 ... 150 Hz
Reverse polarity protection		protected against reverse polarity
Short-circuit protection		pulsing
Voltage drop	U_d	≤ 5 V
Operating current	I_L	0 ... 200 mA
Off-state current	I_r	≤ 0.1 mA
No-load supply current	I_0	≤ 10 mA
Indication of the switching state		LED, yellow

Standard conformity

Standards	IEC / EN 60947-5-2:2004
-----------	-------------------------

Ambient conditions

Ambient temperature	-25 ... 70 °C (248 ... 343 K)
---------------------	-------------------------------

Mechanical specifications

Connection type	V1-connector
Housing material	brass, chromium plated
Sensing face	PBT
Protection degree	IP67