



**Order Code**


**UB120-12GM-I-V1**

**Features**

- Extremely narrow projection cone
- Analogue output 4 mA ... 20 mA
- Very small unusable area
- Measuring window adjustable
- short response time

**Electrical Connection**

Standard symbol/Connections:  
(version I)




Core colours in accordance with EN 60947-5-2.

**Connector V1**



**Dimensions**

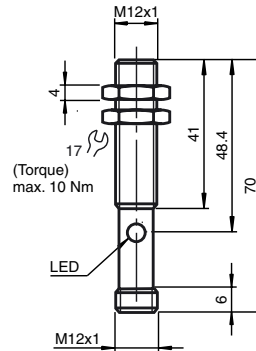

**Technical Data**

**General specifications**

Sensing range	15 ... 120 mm
Adjustment range	20 ... 120 mm
Unusable area	0 ... 15 mm
Standard target plate	10 mm x 10 mm
Transducer frequency	approx. 850 kHz
Response delay	approx. 27 ms

**Indicators/operating means**

LED yellow	permanently yellow: object in the evaluation range yellow, flashing: TEACH-IN function, object detected
LED red	permanently red: Error red, flashing: TEACH-IN function, object not detected

**Electrical specifications**

Operating voltage	10 ... 30 V DC , ripple 10 % <sub>SS</sub>
No-load supply current I <sub>0</sub>	≤ 30 mA

**Input**

Input type	1 TEACH-IN input lower evaluation limit A1: -U <sub>B</sub> ... +1 V, upper evaluation limit A2: +4 V ... +U <sub>B</sub> input impedance: > 4.7 kΩ, pulse duration: ≥ 1 s
------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**Output**

Output type	1 analogue output 4 ... 20 mA, short-circuit/overload protected
Resolution	0.17 mm

Deviation of the characteristic curve	± 1 % of full-scale value
Repeat accuracy	± 0.5 % of full-scale value
Load impedance	0 ... 300 Ohm
Temperature influence	± 1.5 % of full-scale value

**Standard conformity**

Standards	EN 60947-5-7
-----------	--------------

**Ambient conditions**

Ambient temperature	-25 ... 70 °C (248 ... 343 K)
Storage temperature	-40 ... 85 °C (233 ... 358 K)

**Mechanical specifications**

Protection degree	IP65
Connection	V1 connector (M12 x 1), 4-pin
<b>Material</b>	
Housing	brass, nickel-plated
Transducer	epoxy resin/hollow glass sphere mixture; foam polyurethane, cover PBT
Mass	25 g

Release date: 2008-08-20 09:00 Issue date: 2008-08-20 188175\_ENG.xml

**Adjusting the evaluation limits**

The ultrasonic sensor features an analogue output with two teachable evaluation limits. These are set by applying the supply voltage  $-U_B$  or  $+U_B$  to the TEACH-IN input. The supply voltage must be applied to the TEACH-IN input for at least 1 s. LEDs indicate whether the sensor has recognised the target during the TEACH-IN procedure. The lower evaluation limit A1 is taught with  $-U_B$ , A2 with  $+U_B$ .

Two different output functions can be set:

1. Analogue value increases with rising distance to object (rising ramp)
2. Analogue value falls with rising distance to object (falling ramp)

**TEACH-IN rising ramp (A2 > A1)**

- Position object at lower evaluation limit
- TEACH-IN lower limit A1 with  $-U_B$
- Position object at upper evaluation limit
- TEACH-IN upper limit A2 with  $+U_B$

**TEACH-IN falling ramp (A1 > A2):**

- Position object at lower evaluation limit
- TEACH-IN lower limit A2 with  $+U_B$
- Position object at upper evaluation limit
- TEACH-IN upper limit A1 with  $-U_B$

**Default setting**

- A1: unusable area
- A2: nominal sensing range
- Mode of operation: rising ramp

**LED Displays**


Displays in dependence on operating mode	Red LED	Yellow LED
<b>TEACH-IN evaluation limit</b>		
Object detected	off	flashes
No object detected	flashes	off
Object uncertain (TEACH-IN invalid)	on	off
Normal mode (evaluation range)	off	on
Fault	on	previous state

**Installation conditions**


If the sensor is installed at places, where the environment temperature can fall below 0 °C, for the sensors fixation, one of the mounting flanges BF 12, BF 12-F or BF 5-30 must be used. In case of direct mounting of the sensor in a through hole, it has to be fixed at the middle of the housing thread.

**Characteristic Curves/Additional Information**

**Characteristic response curve**

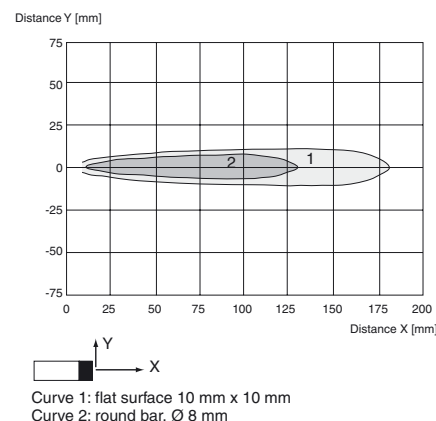

**Programmed analogue output function**

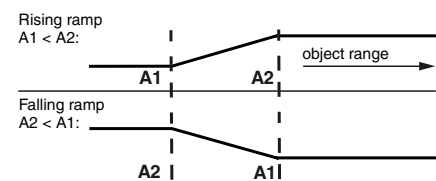

**Accessories**

- UB-PROG2 Programming unit
- BF 5-30 Mounting flange
- BF 12 Mounting flange
- BF 12-F Mounting flange
- V1-G-2M-PVC Cable connector
- V1-W-2M-PUR Cable connector
- UVW90-M12 Ultrasonic -deflector