



Order Code


UB400-12GM-I-V1

Features

- Analogue output 4 mA ... 20 mA
- Measuring window adjustable
- TEACH-IN input
- Temperature compensation

Electrical Connection

Standard symbol/Connections:
(version I)




Core colours in accordance with EN 60947-5-2.

Connector V1



Dimensions

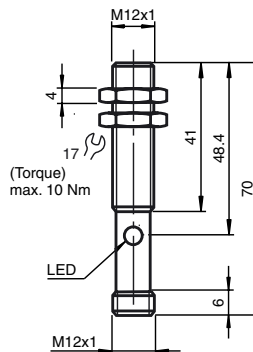

Technical Data

General specifications	
Sensing range	30 ... 400 mm
Adjustment range	50 ... 400 mm
Unusable area	0 ... 30 mm
Standard target plate	100 mm x 100 mm
Transducer frequency	approx. 310 kHz
Response delay	approx. 50 ms
Indicators/operating means	
LED yellow	permanently yellow: object in the evaluation range yellow, flashing: TEACH-IN function, object detected
LED red	permanently red: Error red, flashing: TEACH-IN function, object not detected
Electrical specifications	
Operating voltage	10 ... 30 V DC , ripple 10 % _{SS}
No-load supply current I ₀	≤ 30 mA
Input	
Input type	1 TEACH-IN input lower evaluation limit A1: -U _B ... +1 V, upper evaluation limit A2: +4 V ... +U _B input impedance: > 4.7 kΩ, pulse duration: ≥ 1 s
Output	
Output type	1 analogue output 4 ... 20 mA, short-circuit/overload protected
Resolution	0.17 mm
Deviation of the characteristic curve	± 1 % of full-scale value
Repeat accuracy	± 0.5 % of full-scale value
Load impedance	0 ... 300 Ω at U _B > 10 V; 0 ... 500 Ω at U _B > 15 V
Temperature influence	± 1.5 % of full-scale value
Standard conformity	
Standards	EN 60947-5-2
Ambient conditions	
Ambient temperature	-25 ... 70 °C (248 ... 343 K)
Storage temperature	-40 ... 85 °C (233 ... 358 K)
Mechanical specifications	
Protection degree	IP65
Connection	V1 connector (M12 x 1), 4-pin
Material	
Housing	brass, nickel-plated
Transducer	epoxy resin/hollow glass sphere mixture; foam polyurethane, cover PBT
Mass	25 g

Adjusting the evaluation limits

The ultrasonic sensor features an analogue output with two teachable evaluation limits. These are set by applying the supply voltage $-U_B$ or $+U_B$ to the TEACH-IN input. The supply voltage must be applied to the TEACH-IN input for at least 1 s. LEDs indicate whether the sensor has recognised the target during the TEACH-IN procedure. The lower evaluation limit A1 is taught with $-U_B$, A2 with $+U_B$.

Two different output functions can be set:

1. Analogue value increases with rising distance to object (rising ramp)
2. Analogue value falls with rising distance to object (falling ramp)

TEACH-IN rising ramp (A2 > A1)

- Position object at lower evaluation limit
- TEACH-IN lower limit A1 with $-U_B$
- Position object at upper evaluation limit
- TEACH-IN upper limit A2 with $+U_B$

TEACH-IN falling ramp (A1 > A2):

- Position object at lower evaluation limit
- TEACH-IN lower limit A2 with $+U_B$
- Position object at upper evaluation limit
- TEACH-IN upper limit A1 with $-U_B$

Default setting

- A1: unusable area
- A2: nominal sensing range
- Mode of operation: rising ramp

LED Displays


Displays in dependence on operating mode	Red LED	Yellow LED
TEACH-IN evaluation limit		
Object detected	off	flashes
No object detected	flashes	off
Object uncertain (TEACH-IN invalid)	on	off
Normal mode (evaluation range)	off	on
Fault	on	previous state

Installation conditions


If the sensor is installed at places, where the environment temperature can fall below 0 °C, for the sensors fixation, one of the mounting flanges BF 12, BF 12-F or BF 5-30 must be used. In case of direct mounting of the sensor in a through hole, it has to be fixed at the middle of the housing thread.

Characteristic Curves/Additional Information

Characteristic response curve

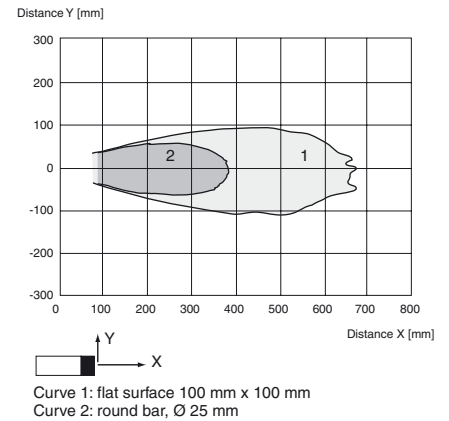

Programmed analogue output function

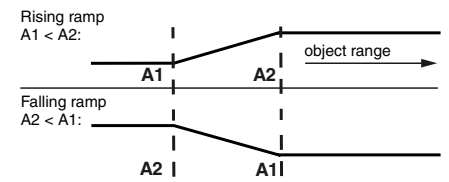

Accessories

- UB-PROG2
Programming unit
- BF 5-30
Mounting flange
- BF 12
Mounting flange
- BF 12-F
Mounting flange
- V1-G-2M-PVC
Cable connector
- V1-W-2M-PUR
Cable connector
- UVW90-M12
Deviation reflector